

F372

Cast Iron Globe Valve

Class 125

F372

Features & Benefits

- Crane cast iron globe valves are highly efficient for throttling because seat and disc designs provide flow characteristics with proportionate relationships between valve lift and flow rate


Materials

PART	MATERIAL	SIZES
Body	Cast Iron BS EN 1561 GJL-250	All
Bonnet	Cast Iron BS EN 1561 GJL-250	All
Disc Guide Pin	Brass BS EN 12164 CW721R	5 & 6
Gland	Brass BS EN 12164 CW614N	All
Gland Flange	Malleable Iron BS EN 1562 GJMB-300-6	All
Gasket	Asbestos Free	All
Disc Stem Ring	Brass BS EN 12164 CW721R	All
Lockwasher	Brass BS EN 1652	All
Disc	Bronze BS EN 1982 CC491K	All
Body Seat Ring	Bronze BS EN 1982 CC491K	All
Stem	Brass BS EN 12164 CW721R	All
Packing	Asbestos Free	All
Yoke Bushing	Brass BS EN 12164 CW721R	All
Handwheel	Malleable Iron BS EN 1562 GJMB-300-6	All



GENERAL VALVES

Dimensional Drawing

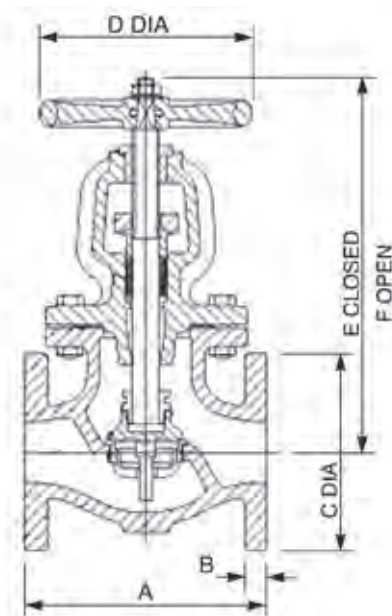

Dimensions & Weights

SIZE (inch)	WEIGHT (kg)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
2	23.1	203	16	152	203	310	335
2 1/2	27.2	216	17	178	203	330	356
3	34.5	241	19	191	229	362	392
4	54.4	292	24	229	254	416	446
5	70.8	330	24	254	305	457	489
6	95.3	356	25	279	305	476	516

Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 65	150	230
PRESSURE (BAR)	13.8	11.4	8.6

Intermediate pressure ratings shall be determined by interpolation.

PRESSURE RATING: Class 125

TEMPERATURE OPERATING RANGE: -10 to 230°C

US END CONNECTION: ANSI Class 125

OPERATOR: Handwheel

AVAILABLE OPTOINS: Flanges Undrilled

SPECIFICATION: Valves are manufactured in accordance with BS 5152: 1974 and also meet the requirements of MSS.SP-85: 2002.

End flanges conform to BS 1560 Section 3.2/ANSI B16.1 Class 125 with Flat Face and are normally supplied drilled.

Valves detailed on this page are dimensioned in metric terms.

This valve is not suitable for use on Group 1 gases or unstable fluids, as defined by the Pressure Equipment Directive 2014/68/EU.*

* See page 155 for more information

Valid as of 290719

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.