


## D921 / D923

Double Regulating Valve (DRV)



PN25

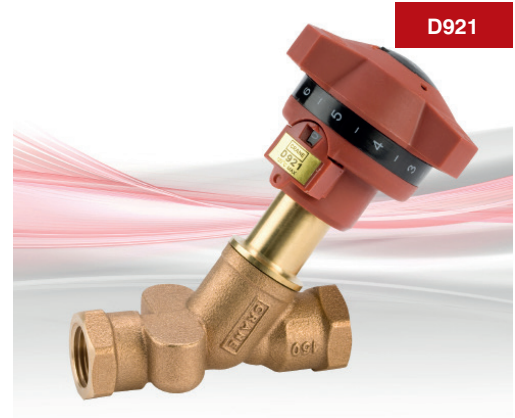

BALANCING VALVES

### Features & Benefits

- The Double Regulating Valve offers an accuracy of  $\pm 5\%$  on all settings for precise flow regulation
- Y-Pattern globe valves with characterised throttling disc tending towards equal percentage performance.
- Double regulating feature allows valve opening to be set with an Allen key
- Operation of the valve is by means of the Microset handwheel
- WRAS approved. Excludes 2"/DN50
- The D921 has sufficient authority to give effective regulation over the range of flows covered by matching flow measurement devices/valves
- The D923 low flow regulating valve has an authority matched to the range of ultra-low flows covered by the D902 flow measurement device


### Materials

PART	MATERIAL	SPECIFICATION
Body	Bronze	BS EN 1982 CC491K
Bonnet	DZR Copper Alloy	BS EN 12165 CW602N
Stem	DZR Copper Alloy	BS EN 12165 CW602N
Disc	DZR Copper Alloy	BS EN 12165 CW602N
O-Ring Seal	EPDM Rubber	
Handwheel	Plastic	

### Dimensions, Coefficients & Weights

FIG. NO.	SIZE A	DIMENSIONS (mm)		FULLY OPEN		WEIGHT
		B	(Kv)	FLOW (K)	HEAD LOSS (kg)	
D921	1/2"/DN15	87	105	2.14	23.11	0.54
	3/4"/DN20	96	106	3.61	26.14	0.58
	1"/DN25	100	127	6.37	21.45	0.88
	1 1/4"/DN32	114	128	12.30	17.42	1.05
	1 1/2"/DN40	125	143	21.30	10.66	1.43
	2"/DN50	146	144	31.30	12.63	1.88
D923	1/2"/DN15	87	105	2.26	20.72	0.54

### Dimensional Drawing

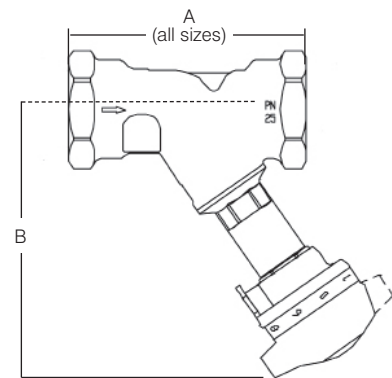

### Pressure/Temperature Ratings

#### Threaded

TEMPERATURE (°C)	-10 to 100	110	120
PRESSURE (BAR)	25	23.4	21.8

#### Compression

TEMPERATURE (°C)	-10 to 30	65	120
PRESSURE (BAR)	16	10	5

Intermediate pressure ratings shall be determined by interpolation.

Maximum temperature 120° C.

**Note:** In line with BS EN 1254/2 the maximum pressure must not exceed 16 bar when using compression adaptors.

WRAS approved -10 to 85° C  
2"/DN50 not WRAS approved.

**SPECIFICATION:** Conforms to BS 7350\*:1990

**END CONNECTIONS:** Sizes 1" to 2" taper threaded to BS EN 10226-2 (ISO 7-1) formerly BS 21.

Sizes 1/2" & 3/4" DN15 & DN20 parallel threaded to BS EN ISO 228-1 (formerly BS 2779).

Adaptor kits for use with copper tube also available. Also available threaded to ANSI B1.20.1.

Please add suffix AT to denote American Thread i.e. D921AT/D923AT

Valid as of 070222

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.