

# FM278W

Strainer



PN25

FM278W



GENERAL VALVES

## Features & Benefits

- Scale and dirt in piping systems causes endless trouble and frequent serious damage to pipeline equipment
- Installation of Crane strainers will help eliminate the problems caused by foreign matter with piping systems
- WRAS approved range from DN65 to DN150
- WRAS approved for use with wholesome (potable) water
- WRAS approved internal epoxy powder coating


## Materials

PART	MATERIAL	SPECIFICATION
Cap	Ductile Iron	BS EN 1563 EN GJS 500/7
Gasket	Asbestos Free	
Stud	Steel	BS 4439 GRADE 8.8
Nut	Steel	BS 3692 GRADE 8
Screen Hole Size Ø1.5mm 32% Open Ratio	Stainless Steel	Type 304
Drain Plug	Malleable Iron	
Test Point Plug Rc 1/4	Malleable Iron	

## Dimensions & Weights

SIZE (DN)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (Rc)	WEIGHT (kg)
65	185	19	118	3	273	210	298	1 1/4"	18
80	200	19	132	3	295	215	301	1 1/4"	21
100	235	19	156	3	352	245	350	1 1/4"	32
125	270	19	184	3	412	297	430	1 1/2"	46
150	300	20	211	3	470	333	484	1 1/2"	62

## Dimensional Drawing

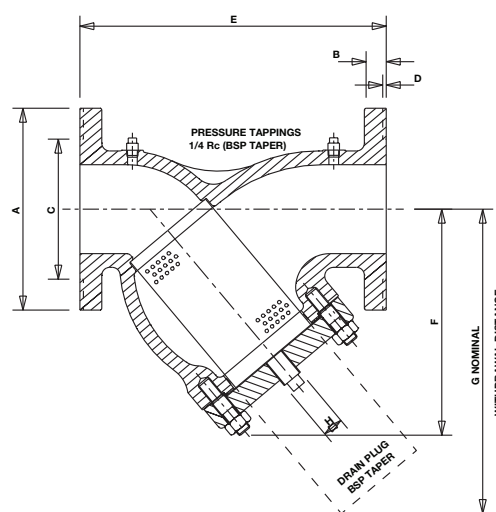

## Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 85
PRESSURE (BAR)	25

Intermediate pressure ratings shall be determined by interpolation.

### END CONNECTION:

Flanged to BS EN 1092-2 PN25

**SPECIFICATION:** Flanges conform to BS EN 1092-2 PN25 Section 3.2 table 11 with raised face.

Strainers are supplied with a stainless steel perforated strainer element having 1.6mm diameter holes.

This product is suitable for use on Group 2 liquids only, as defined by the Pressure Equipment Directive 2014/68/EU.\*

\* See page 159 for more information

Valid as of 081220

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.