

# D130W

## Single Non-Return Valve



PN16

D130W



### Features & Benefits

- Spring loaded axially guided disc
- Positive non-slam shut-off
- WRAS approved for use with wholesome (potable) water to 85°C
- Resilient seat

### Materials


PART	MATERIAL	SPECIFICATION	
		BS EN	ASTM
Body	Cast Iron	1561 EN-GJL-250	A126 CLASS B
Disc	Cast Iron	1561 EN-GJL-250	A126 CLASS B
Seat	EPDM	WRAS Approved	-
Spring	Stainless Steel 304	1.4301	AISI 304
Stem	Stainless Steel 304	1.4301	AISI 304
Bushing	Brass	12164 CW617N	-
Bushing	Cast Iron	1561 EN-GJL-250	A126 CLASS B

### Dimensions & Weights

SIZE (DN)	A (mm)	B (mm)	WEIGHT (kg)
50	100	165	8
65	120	185	10
80	140	200	13
100	170	220	17
125	200	250	28
150	230	285	38
200	288	340	52
250	354	405	85
300	410	460	125

Note: These valves are not intended to be used as backflow prevention devices conforming to Schedule 2 Section 6 of the WRAS Water Regulations Guide.

### Dimensional Drawing

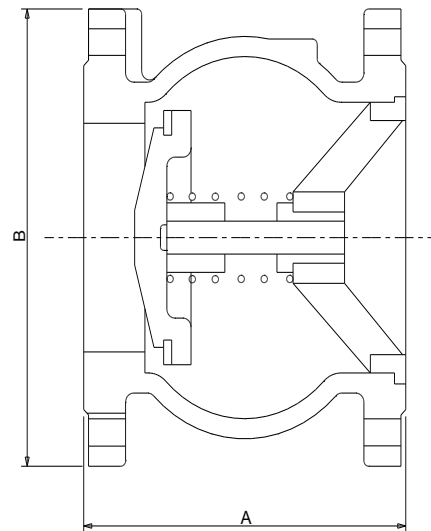

**PRESSURE / TEMPERATURE RATING:** 16 bar from -10 to 110°C (WRAS to 85°C)

**SPECIFICATION:** Flanged to BS EN 1092-2 PN16.