

# D156

D156

Brass Gate Valve  
Non rising stem

PN16

## Features & Benefits

- Crane gate valves offer the ultimate in dependable service wherever minimum pressure drop is important



GENERAL VALVES


## Materials

PART	MATERIAL	SIZES
Body	Brass BS EN 12164 CW617N	All
Bonnet	Brass BS EN 12164 CW617N	All
Stem	Brass BS EN 12165 CW617N	All
Packing Nut	Brass BS EN 12165 CW617N	All
Packing	Asbestos Free	All
Stem Bush	Brass BS EN 12165 CW617N	All
Disc	Brass BS EN 12164 CW617N	All
Handwheel	Aluminium	All
Handwheel Nut	Steel (Zinc Plated)	All

## Dimensions & Weights

SIZE (inch)	WEIGHT (kg)	A (mm)	B (mm)	C (mm)
1/4	0.2	41	69	44
3/8	0.2	41	69	44
1/2	0.22	48	69	44
3/4	0.35	54	79	52
1	0.52	62	92	52
1 1/4	0.77	68	108	65
1 1/2	1.02	72	125	70
2	1.75	82	150	92
2 1/2	2.77	97	176	103
3	3.9	111	204	120
4	6.35	131	262	152

## Dimensional Drawing

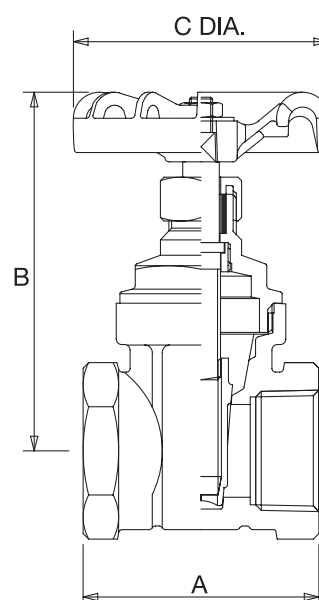

## Pressure/Temperature Ratings

TEMPERATURE (°C)	-10 to 100	170
PRESSURE (BAR)	16	7

Intermediate pressure ratings shall be determined by interpolation.

**PRESSURE RATING:** PN16

**TEMPERATURE OPERATING RANGE:** -10 to 170°C

**UK END CONNECTION:** Taper threaded to BS EN 10226-2 (ISO 7-1) formerly BS 21

**US END CONNECTION:** ANSI B1.20.1

**OPERATOR:** Handwheel.

Gate valves are best for services that require infrequent valve operation, and where the disc is kept either fully opened or fully closed. They are not practical for throttling.

**SPECIFICATION:** Valves 1/4" to 2" are manufactured in accordance with BS EN 12288: 2010 PN16 for Series B ratings. Non-Rising Stem.

Suitable for use on Group 2 Gas, Group 1 and Group 2 Liquids as defined by Pressure Equipment Directive 2014/68/EU, and Pressure Equipment (Safety) Regulations 2016, as amended.\*

Not suitable for use on Group 1 Gases or unstable liquids.

\*see *Quality Assurance* page for more information